




**FORWARDS
FOR WORLD**

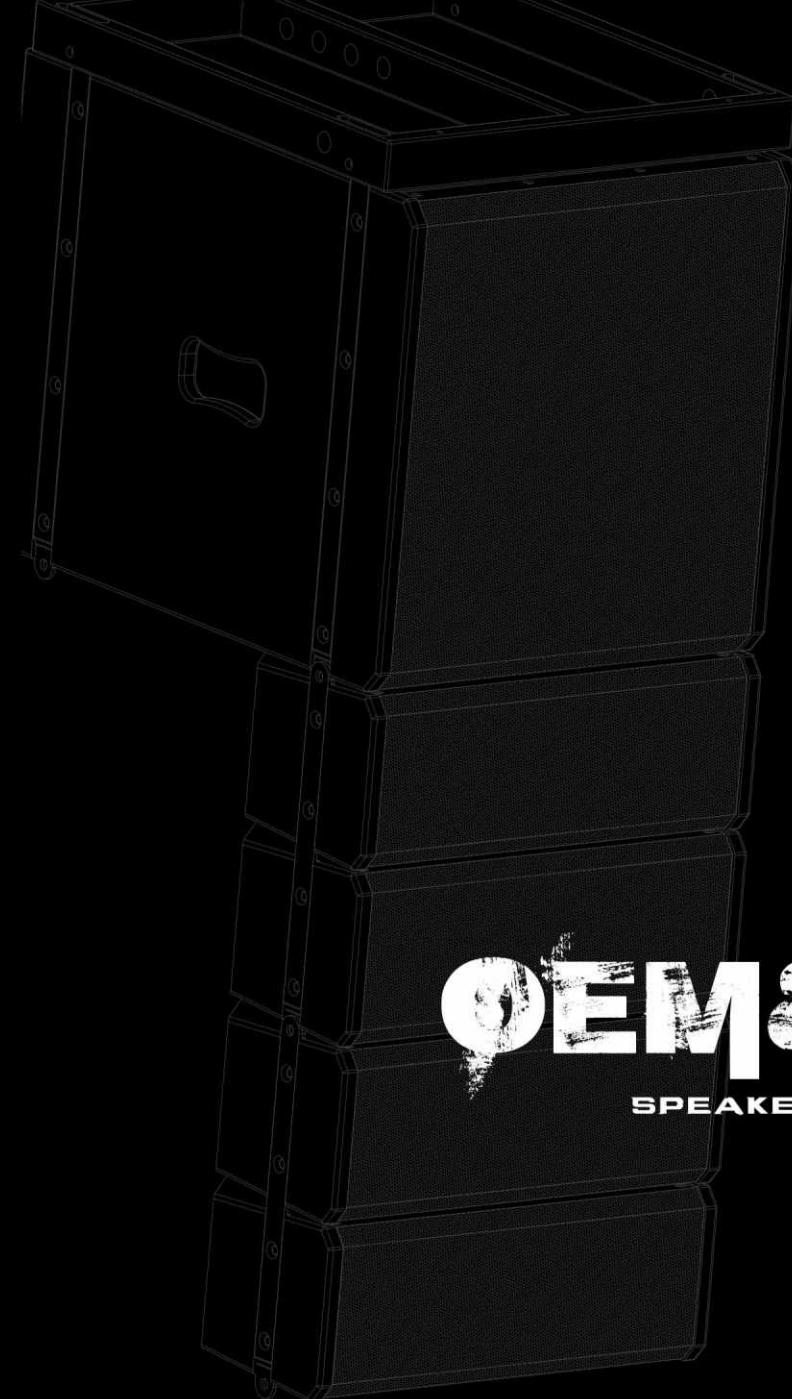

OEM&ODM
SPEAKER FACTORY

NINGBO YXSOUND CO.,LTD

Add: Sanxing Qiao, Meiyuan Village, Yinjiang town.
Ningbo City 315158, Zhejiang Province, China

Email: export1@yxsound.com
tech@yxsound.com
export@yxsound.com

Web: www.yxsound.com
www.globalsources.com/yxsound.co



**PROFESSIONAL
AUDIO
2020**

About Us

Founded in 2009, YXSOUND is located in the fourth largest port city—Ningbo—in the world with superior geographic position and convenient transportation. It's 40km from Ningbo—Zhoushan Port and 10km to Ningbo Lishe International Airport, and it takes about 2hrs to drive to Shanghai.

The company, covering an area of 12,300 square meters with over 150 employees, is a comprehensive professional audio enterprise which integrates self-research and development, design, production professional stage speaker series, power amplifier series and loudspeaker series.

Through nearly 10-year steady development, YXSOUND has become an influential audio enterprise. YXSOUND lays the emphasis on innovative research and development abilities, so it has founded a R & D center which is in possession of a senior engineer team in electronics and acoustics and equipped with international standard audio-visual room. Moreover, it has introduced world advanced development and detecting instruments to provide the most reliable guarantee for its products like Italian CLIO detection system, LMS electro acoustic analysis system and AP audio analyzer.

Manufacturing force is the foundation of an enterprise. Through years of pioneering with arduous efforts and courageous striving, YXSOUND has constructed complete organizational structure, consisting of production headquarter, R & D center, experimental center, PMC center, sales center and quality control center. Advanced production equipments have been introduced including ICT automatic tester, assembling/aging integrated automatic double-layer assembly line, automatic packaging line, etc so that its manufacturing ability has been continuously improved, and moreover, its production technologies have reached the world advanced level. YXSOUND audio products have been exported to dozens of global countries and regions like Europe, America, the Middle East, Southeast Asia and Africa. Tens of thousands of people are experiencing perfect sound effect brought by YXSOUND.

YXSOUND has always persisted in people-oriented management concept, continuously improved the living and production conditions of its employees and built facilities like basketball court, billiard hall and fitness room. All kinds of recreational activities like Spring Festival Party and travel are organized every year, which have enriched employees' life and strengthened its cohesive force. It has realized the fact that employees regard the factory as their home in which they actively work and happily live.

Out of infinite pursuit for perfect sound effect, YXSOUND is using 10- year experience to forge ahead towards a "high-power, digital and intelligent" modern enterprise which manufactures advanced sound equipments for global consumers.

Let YXSOUND ring throughout the world!



Contents

- Portable Column PA 1.1 System
- 2.1 Combo Set
- Compact Line Array System
- Plastic Portable Speaker



PORTABLE COLUMN PA1.1 SYSTEM

Specifications

System type	Single 10" portable column system
Power rating(AES)	400W+100W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x10", 2"VC 80Oz Ferrite magnet
HF	8x2"Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Small volume, all-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA100



LA100 LA100DSP

LA200



LA200 LA200DSP

Specifications

System type	Dual 10" portable column system
Power rating(AES)	400W+100W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	2x10", 2"VC 80Oz Ferrite magnet
HF	8x2" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Small volume, all-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	Single 12" portable column system
Power rating(AES)	400W+100W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x12",2"VC 80Oz Ferrite magnet
HF	5x3.5" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- All-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA120A



LA120A

Specifications

System type	Single 10" portable column system
Power rating(AES)	400W+100W
Frequency response	50Hz-19KHz
Sensitivity(1W/1m)	103dB
Nominal impedance	4Ohm
LF	1x10",2"VC 80Oz Ferrite magnet
HF	5x3.5" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LAX5



LAX5

LA2210A



LA2210A

Specifications

System type	Dual 10" portable column system
Power rating(AES)	700W+300W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	2x10",2"VC 80Oz Ferrite magnet
HF	10x3.5" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- All-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LAX8



LAX8

Specifications

System type	Single 12" portable column system
Power rating(AES)	400W+100W
Frequency response	45Hz-19KHz
Sensitivity(1W/1m)	103dB
Nominal impedance	4Ohm
LF	1x12",2"VC 80Oz Ferrite magnet
HF	8x2" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	Single 15" portable column system
Power rating(AES)	350W+350W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x15",3"VC 80Oz Ferrite magnet
HF	5x4" Neodymium Tweeter

LAX10



LAX10

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- All-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	Single 10" portable column system
Power rating(AES)	250W+50W
Frequency response	50Hz-18.5KHz
Sensitivity(1W/1m)	96dB
Nominal impedance	4Ohm
LF	1x10",2"VC 50Oz Ferrite magnet
HF	4x3.5"Neodymium Tweeter

LA10



LA10

Product characteristics

- High quality unit Plastic box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LAX12

Specifications

System type	Single 15" portable column system
Power rating(AES)	350W+350W
Frequency response	35Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x15",3"VC 80Oz Ferrite magnet
HF	8x4" Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- All-in-one packing for easy transportation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 一体化包装，便于搬运

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA350

Specifications

System type	Single 12" portable column system
Power rating(AES)	300W+50W
Frequency response	45Hz-18.5KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x12",2"VC 80Oz Ferrite magnet
HF	4x3.5"Neodymium Tweeter

Product characteristics

- High quality unit Plastic box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构



LAX12



LA350



Specifications

System type	Single 10" portable column system
Power rating(AES)	250W+50W
Frequency response	50Hz-18.5KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x10",2"VC 80Oz Ferrite magnet
HF	4x3.5" Neodymium Tweeter

LA300



Product characteristics

- High quality unit Plastic box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	Single 12" portable column system
Power rating(AES)	350W+350W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	96dB
Nominal impedance	4Ohm
LF	1x12",3"VC 60Oz Ferrite magnet
HF	1xAD24

LA20



LA20

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D DSP amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便
- 数字DSP功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构



HM12-1.1

Specifications

System type	Single 12" portable column system
Power rating(AES)	400W+100W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	96dB
Nominal impedance	4Ohm
LF	1x12",2"VC 80Oz Ferrite magnet
HF	4x2"woofer,1pcs Neodymium Tweeter

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便
- 数字功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA40



LA40

Specifications

System type	Single 15" portable column system
Power rating(AES)	350W+350W
Frequency response	40Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x15",3"VC 80Oz Ferrite magnet
HF	1xAD44

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D DSP amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便
- 数字DSP功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

2.1 COMBOSET SERIES



HM12-2.1



Specifications

System type	12" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x12",2"VC 80Oz Ferrite magnet
HF	(4x4"woofer,+1" Neodymium Tweeter)x2

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便
- 数字功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA900



Specifications

System type	18" 2.1 audio system
Power rating(AES)	300W+2x150W
Frequency response	40Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x18",3"VC 80Oz Ferrite magnet
HF	(4x4"woofer,+1 pcs Tweeter)x2

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D DSP amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便
- 数字DSP功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	12" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	8Ohm
LF	1x12",3"VC 60Oz Ferrite magnet
HF	2xAD24

LA402



Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 便携的杆式安装，运输方便。
- 数字功放，大功率强音效输出

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	Dual 8" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	55Hz-18KHz
Sensitivity(1W/1m)	96dB
Nominal impedance	4Ohm
LF	2x8",2"VC 40Oz Ferrite magnet
HF	(1pc yx040n38)*2

LA208



Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation
- Class D 4-channels mixer amplification

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装
- 数字四路调音台功放，功能多样化

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA404

Specifications

System type	15" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	40Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	8Ohm
LF	1x15",3"VC 80Oz Ferrite magnet
HF	2xAD44

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Pole mountable, easy setup and transportation
- Class D amplification, high power output

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

- 产品特性
- 高品质单元配置，高强度夹板箱体
 - 多种使用和安装方式，操作简易快捷
 - 便携的杆式安装，运输方便。
 - 数字功放，大功率强音效输出

- 适应范围
- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA403

Specifications

System type	Dual 8" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	55Hz-18KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	2x8",2"VC 40Oz Ferrite magnet
HF	2xAD24

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation
- Class D 4-channels mixer amplification

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

- 产品特性
- 高品质单元配置，高强度密度板箱体
 - 多种使用和安装方式，操作简易快捷
 - 体积小，重量轻便于搬运和固定安装
 - 数字四路调音台功放，功能多样化

- 适应范围
- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

Specifications

System type	12" 2.1 audio system
Power rating(AES)	400W+2x100W
Frequency response	50Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x12", 2"VC 80Oz Ferrite magnet
HF	(1x5"YX050N+1"Neodymium driver)*2

Product characteristics

- High quality unit configuration, High strength MDF box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation
- Class D 8-channels mixer amplification

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度密度板箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装
- 数字八路调音台功放，功能多样化


适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构

LA400



The LA400, adopt the concept of All-in one PA system, featured an integrated eight-channel digital mixer. Different setup ways just in seconds, fast and convenient .Its flexibility and the comprehensive range of available accessories, make it stereoperfect for a huge variety of event types and uses.

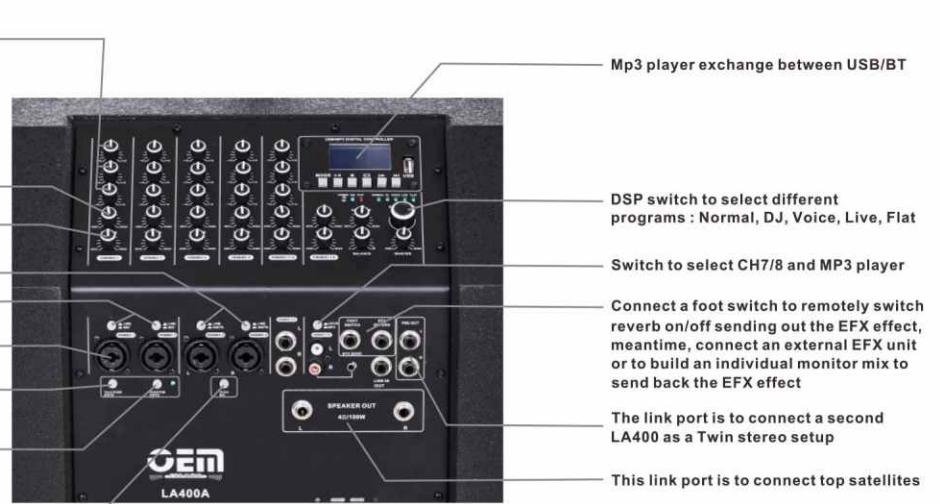

LA400

SETUP OPTIONS



LA450

Specifications

System type	10" 2.1 audio system
Power rating(AES)	250W+50W
Frequency response	55Hz-19KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x10", 2"VC 50Oz Ferrite magnet
HF	(1x5"YX050N+1"driver)*2

Product characteristics

- High quality unit Plastic box
- Various usage modes, simple and quick operation
- Small volume, light and convenient installation

Scope of application

- Small scale Itinerant commercial performance , Sound reinforcement
- for the band ,Meeting room, Multi-function hall , Church ,Classroom
- teaching, Training institution

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 多种使用和安装方式，操作简易快捷
- 体积小，重量轻便于搬运和固定安装

适应范围

- 小型流动商演，乐队扩声，会议室，多功能厅，教堂，教学，培训机构



LA450

COMPACT LINE ARRAY SYSTEM



Specifications

System type	15" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15", 3"VC 80Oz Ferrite magnet
HF	(2x5"woofer,+1"Titanium driver)x4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
 - Outdoor sound reinforcement,
 - live performances and events as well as fixed installations in theatres, concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

适应范围

- 户外演出，现场表演，活动，以及固定场所，剧院，音乐厅，礼堂，学院

LA1525A



LA1525A

LA1526A



LA1526A

Specifications

System type	15" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15", 3"VC 80Oz Ferrite magnet
HF	(2x6"woofer,+1"Titanium driver)x4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
 - Outdoor sound reinforcement,
 - live performances and events as well as fixed installations in theatres, concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

适应范围

- 户外演出，现场表演，活动，以及固定场所，剧院，音乐厅，礼堂，学院

Specifications

System type	Dual 8" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	55Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	2x8", 2"VC 40Oz Ferrite magnet
HF	(2x5"woofer+1"Titanium driver)x4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation

Scope of application

- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

LA2825A



LA1526A

Specifications

System type	12" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x12", 3"VC 60Oz Ferrite magnet
HF	4*AD24

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection

Scope of application

- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

LA24



LA4

Specifications

System type	Dual 8" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	50Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	2x8", 2.5"VC 40Oz Ferrite magnet
HF	(2x4"YX040N+1"Neodymium driver)*4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection

Scope of application

- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

- 适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

LA44

Specifications

System type	15" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	40Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15", 3"VC 80Oz Ferrite magnet
HF	4*AD44

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection

Scope of application

- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护功能全面

- 适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

Specifications

System type	12" Active Line Array system
Power rating(AES)	400W+400W
Frequency response	55Hz-20KHz
Sensitivity(1W/1m)	99dB
Nominal impedance	4Ohm
LF	(1x12"woofer,12NDL76)X4
HF	(1x3" Neodymium driver DE880TN)x4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

AERO 12



AERO 12

Specifications

System type	18" Active Line Array system
Power rating(AES)	600W+2x350W
Frequency response	40Hz-20KHz
Sensitivity(1W/1m)	99dB
Nominal impedance	8Ohm
LF	1x18",4"VC 125Oz Ferrite magnet
HF	(1x12"12NDL76,3*1.35"Neodymium driver)*2

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院

VRX918A+VRX932A



VRX932A

VRX918A

LA210

Specifications

System type	Dual 10" Passive Line Array system
Power rating(AES)	800W
Frequency response	55Hz-20KHz
Sensitivity(1W/1m)	99dB
Nominal impedance	4Ohm
LF	(2x10"10NDL76)X4
HF	(2x1.75" Neodymium driver DE400)x4

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院



10NDL76

DE 400

VRX915A+VRX928

Specifications

System type	15" Active Line Array system
Power rating(AES)	350W+350W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	97dB
Nominal impedance	4Ohm
LF	1x15",3"VC 80Oz Ferrite magnet
HF	(1x8"8NDL38,2*1"Neodymium driver)*2

Product characteristics

- High quality unit configuration, High strength Plywood box
- Various usage modes, simple and quick operation
- Wide,constant directivity, coverage angle
- Soft limiter and RMS protection
- Scope of application
- Outdoor sound reinforcement,
- live performances and events as well as fixed installations in theatres,
- concert halls or church , school

产品特性

- 高品质单元配置，高强度夹板箱体
- 多种使用和安装方式，操作简易快捷
- 音域范围宽，恒方向性，覆盖角广
- 功放保护保护功能全面

适应范围

- 户外演出,现场表演,活动,以及固定场所,剧院,音乐厅,礼堂,学院



VRX915A



PLASTIC PORTABLE SPEAKER



Specifications

System type	Plastic active speaker
Power rating(AES)	350W+50W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15".3"VC 60Oz Ferrite magnet
HF	1.75"Titanium Driver

MF series



Product characteristics

- High quality unit Plastic box
- Class D amplification, high power output
- Small volume, light and convenient installation

Scope of application

- For sound reinforcement , outdoor
- get-together, meeting room, multi-function hall,
- church ,classroom

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 数字功放，大功率强音输出
- 体积小，重量轻便于搬运和固定安装

适应范围

- 用于全音频扩声,户外广场舞,会议室,多功能厅,教堂,学校教室

SPECIFICATIONS	MF8AUSB	MF10AUSB	MF12AUSB	MF15AUSB
System Type	8" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	10" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	12" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (5EQ.)	15" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (5EQ.)
Frequency Range(-10dB)	60Hz-20kHz	55Hz-20kHz	50Hz-20kHz	45Hz-20kHz
Frequency Response(-5dB)
Impedance	4 Ohm	4 Ohm	4 Ohm	4 Ohm
Coverage Pattern	90(Horizontal*70(Vertical)	90(Horizontal*70(Vertical)	90(Horizontal*60(Vertical)	90(Horizontal*60(Vertical)
Output(SPL)	95dB	95dB	97dB	98dB
RMS Power	150W	150W	300W	400W
MAX Power	300W	300W	600W	800W
Amplifier Type	Class A/B(Class D DSP)	Class A/B(Class D DSP)	Class H(Class D DSP)	Class H(Class D DSP)
LF Driver	8"Transducer With 1.5"Voice Coil	10"Transducer With 2"Voice Coil	12"Transducer With 2.5"Voice Coil	15"Transducer With 3"Voice Coil
HF Driver	1"Titanium Driver	1"Titanium Driver	1.35"Titanium Driver	1.75"Titanium Driver
Controls & Selectors	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control
Indicator LED's	Power,Clip	Power,Clip	Power,Clip	Power,Clip
AC Power Connector	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz
Dimensions(L W H)	310+260+460mm	400+350+550mm	400+350+550mm	400+350+550mm
Net Weight	10Kgs	12Kgs	18Kgs	20Kgs



MF8AUSB

MF8ADSP

MF10AUSB

MF10ADSP

MF12AUSB

MF12ADSP

MF15AUSB MF15ADSP

Specifications

System type	Plastic active speaker
Power rating(AES)	350W+50W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15",3"VC 60Oz Ferrite magnet
HF	1.75"Titanium Driver

MG series

Product characteristics

- High quality unit Plastic box
- Class D amplification, high power output
- Small volume, light and convenient installation

Scope of application

- For sound reinforcement , outdoor
- get-together, meeting room, multi-function hall,
- church ,classroom

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 数字功放，大功率强音输出
- 体积小，重量轻便于搬运和固定安装

适应范围

- 用于全音域扩声,户外广场舞,会议室,多功能厅,教堂,学校教室

Specifications

System type	Plastic active speaker
Power rating(AES)	350W+50W
Frequency response	45Hz-20KHz
Sensitivity(1W/1m)	98dB
Nominal impedance	4Ohm
LF	1x15",3"VC 60Oz Ferrite magnet
HF	1.75"Titanium Driver

MQ series

Product characteristics

- High quality unit Plastic box
- Class D amplification, high power output
- Small volume, light and convenient installation

Scope of application

- For sound reinforcement , outdoor
- get-together, meeting room, multi-function hall,
- church ,classroom

产品特性

- 高品质单元配置，高强度工程塑胶箱体
- 数字功放，大功率强音输出
- 体积小，重量轻便于搬运和固定安装

适应范围

- 用于全音域扩声,户外广场舞,会议室,多功能厅,教堂,学校教室

SPECIFICATIONS	MG8AUSB	MG10AUSB	MG12AUSB	MG15AUSB
System Type	8" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	10" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	12" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (5EQ.)	15" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (5EQ.)
Frequency Range(-10dB)	60Hz-20kHz	55Hz-20kHz	50Hz-20kHz	45Hz-20kHz
Frequency Response(-6dB)
Impedance	4 Ohm	4 Ohm	4 Ohm	4 Ohm
Coverage Pattern	90(Horizontal)×70(Vertical)	90(Horizontal)×70(Vertical)	90(Horizontal)×60(Vertical)	90(Horizontal)×60(Vertical)
Output(SPL)	95dB	95dB	97dB	98dB
RMS Power	150W	150W	300W	400W
MAX Power	300W	300W	600W	800W
Amplifier Type	Class A/B(Class D DSP)	Class A/B(Class D DSP)	Class H(Class D DSP)	Class H(Class D DSP)
LF Driver	8"Transducer With 1.5"Voice Coil	10"Transducer With 2"Voice Coil	12"Transducer With 2.5"Voice Coil	15"Transducer With 3"Voice Coil
HF Driver	1"Titanium Driver	1"Titanium Driver	1.35"Titanium Driver	1.75"Titanium Driver
Controls & Selectors	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control
Indicator LED's	Power,Clip	Power,Clip	Power,Clip	Power,Clip
AC Power Connector	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz
Dimensions(L W H)	310×260×460mm	400×350×550mm	400×350×550mm	400×350×550mm
Net Weight	10Kgs	12Kgs	18Kgs	20Kgs


MF8AUSB

MF8ADSP

MF10AUSB

MF10ADSP

MF12AUSB

MF12ADSP

MF15AUSB

MF15ADSP

SPECIFICATIONS	MQ8AUSB	MQ10AUSB	MQ12AUSB	MQ15AUSB
System Type	8" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	10" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control	12" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (SEQ.)	15" 2-Way Active Speaker Box With MP3, USB, SD, Bluetooth, FM, Remote control, (SEQ.)
Frequency Range(-10dB)	60Hz-20kHz	55Hz-20kHz	50Hz-20kHz	45Hz-20kHz
Frequency Response(-6dB)
Impedance	4 Ohm	4 Ohm	4 Ohm	4 Ohm
Coverage Pattern	90(Horizontal)×70(Vertical)	90(Horizontal)×70(Vertical)	90(Horizontal)×60(Vertical)	90(Horizontal)×60(Vertical)
Output(SPL)	95dB	95dB	97dB	98dB
RMS Power	150W	150W	300W	400W
MAX Power	300W	300W	600W	800W
Amplifier Type	Class A/B(Class D DSP)	Class A/B(Class D DSP)	Class H(Class D DSP)	Class H(Class D DSP)
LF Driver	8"Transducer With 1.5"Voice Coil	10"Transducer With 2"Voice Coil	12"Transducer With 2.5"Voice Coil	15"Transducer With 3"Voice Coil
HF Driver	1"Titanium Driver	1"Titanium Driver	1.35"Titanium Driver	1.75"Titanium Driver
Controls & Selectors	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control	Power,MIC Volume, Line Volume,High&Low EQ Control
Indicator LED's	Power,Clip	Power,Clip	Power,Clip	Power,Clip
AC Power Connector	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz	110/220v,50/60Hz
Dimensions(L W H)	310×260×460mm	400×350×550mm	400×350×550mm	400×350×550mm
Net Weight	10Kgs	12Kgs	18Kgs	20Kgs


MQ8AUSB

MQ8ADSP

MQ10AUSB

MQ10ADSP

MQ12AUSB


MQ12ADSP

MQ15AUSB

MQ15ADSP



Application of lecture conference teaching display

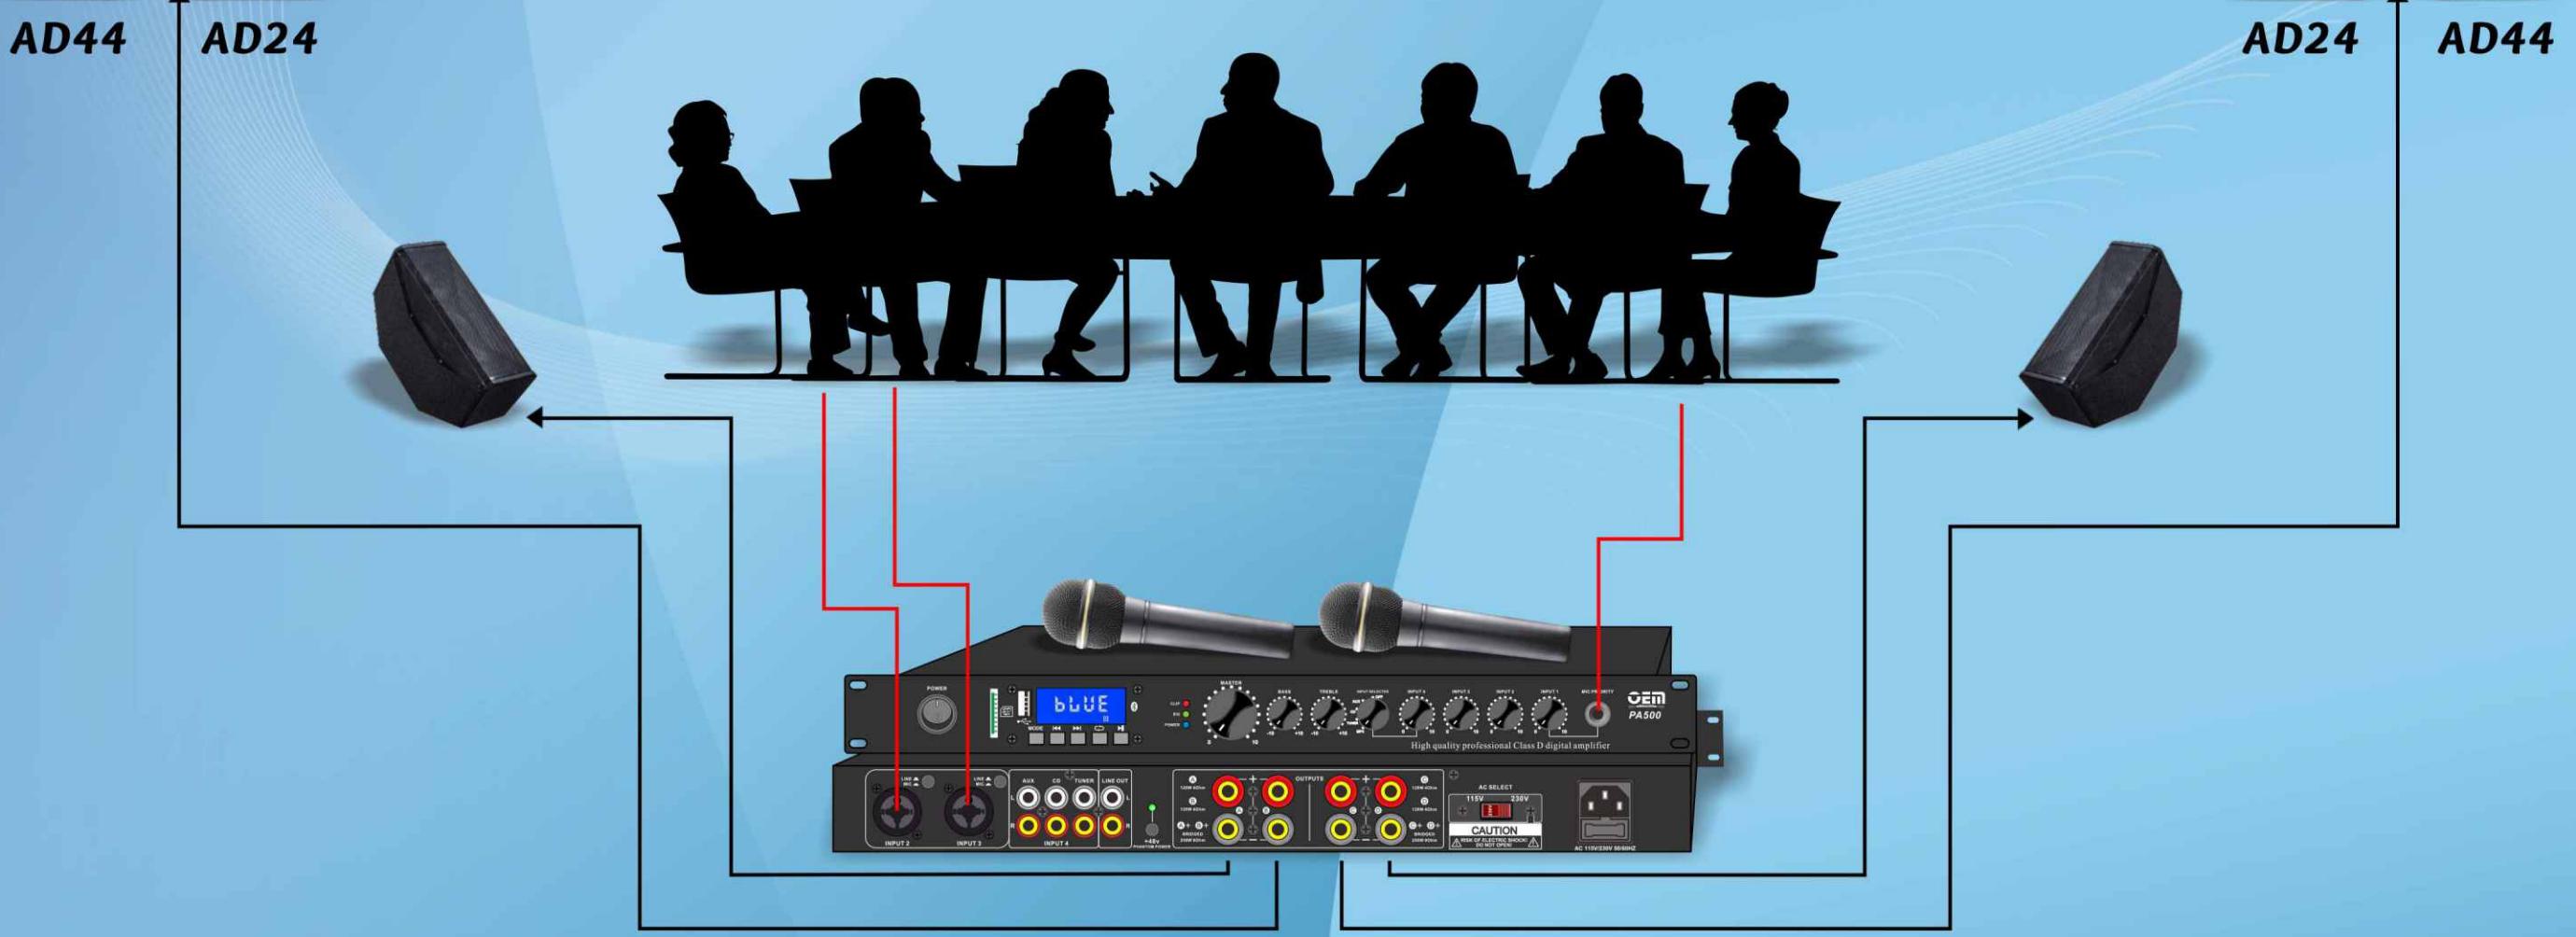

PA500

PA series is a 4-channel class D amplifier with advanced high performance class D circuit design, three-level audio filtering, perfect noise performance .SMT technology, low voltage startup function, radiator suspension design, perfect protect function makes the whole series stronger overall performance, more stable performance.

- PA系列为四通道D类数字功放，采用先进的高性能D类电路设计，三级音频滤波，完美的噪音表现。SMT 技术，低电压开机功能，散热器悬浮设计，完美的保护功能使整个系列整体表现力更强，性能更稳定。